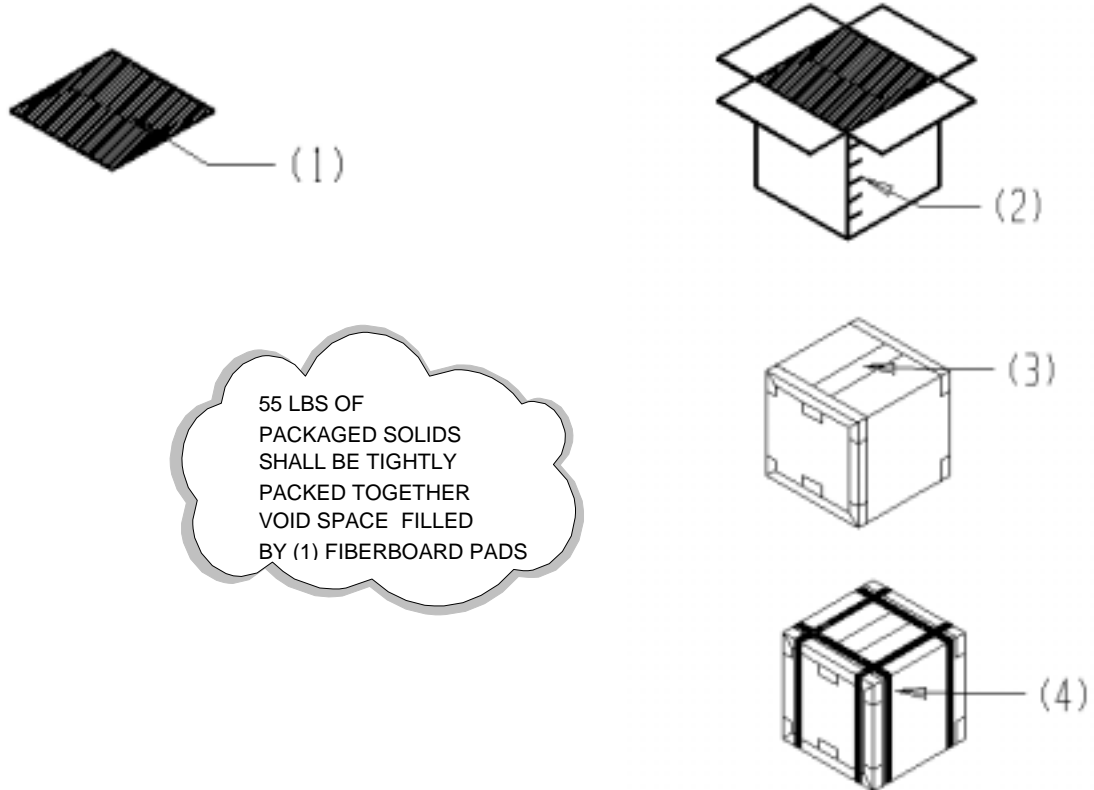


**Appendix C (Continued)****Section III. Drawing**

ITEM	DESCRIPTION	99AYP003
NOTE	LITHIUM BATTERIES SHALL BE PACKAGED IAW MIL-B-49430, i.e., EACH IN A CHIPBOARD/PAPERBOARD BOX, SEALED IN A POLYETHYLENE BAG	
1	FIBERBOARD, GRADE W5c OR V3c IAW ASTM D 4727, TOP PAD, 12 X 12 IN.; CUT SIZES TO FIT VOIDS	
2	FIBERBOARD BOX, 12 x 12 x 12 IN. (ID), ASTM D 5118, STYLE RSC WITH STAPLED JOINT; GRADE V3c IAW ASTM D 4727	
3	7 STRIPS PRESSURE-SENSITIVE ADHESIVE TAPE, 2-IN. WIDE, IAW ASTM D 5486, TY I (FILM-BACKED, NSN 7510-00-266-6715), or TY V (PAPER-BACKED, NSN 7510-00-297-6655)	
4	PRESSURE-SENSITIVE ADHESIVE TAPE, FILAMENT-REINFORCED, IAW ASTM D 5330, ¾-IN. WIDE, TY IV (HIGH TENSILE, NSN 7510-00-584-5785, RECOMMENDED), or 1-IN. WIDE, TY II (MEDIUM TENSILE, NSN 7510-00-582-4772); 2 GIRTHWISE BANDS, 2 LENGTHWISE BANDS, 2 IN. IN FROM ENDS	